

PHASE FAILURE RELAYS

MKC-01, MKS-01, MKC-03, MKC-03P, MKS-03, MKC-04

General

One of the common faults faced in industrial plants is over-heating and burning of 3 phase motors due to the phase failure. "Thermic-magnetic device" which is an essential element in motor protection is generally too slow due to both its electro-mechanical structure and the use of high current setting range to assure demarrage without tripping. Being designed to eliminate the above disadvantages, MKC-01, MKC-03 and MKC-03P Phase Failure Devices react within 0.2 seconds (fixed) against the following faults and take the motor out of service.

1. Voltage Unbalance (Not Adjustable)


MKC-01, MKC-03 and MKC-03P have neutral connection. Unbalanced voltage for Phase-Neutral (fixed). When the value exceeds the 40% for MKC-03, MKC-03P and MKC-04 or 20% for MKC-01 and MKS-01 output relay switches-off the motor.

- Unbalanced voltage may occurred when;
- The mains are loaded with unbalanced distribution,

One of the 3-phase of motor has lost. In this case, some amount of voltage which produced by other phases will be inducted on the lost phase. Amount of this value depends on both the motor type and amount of load.

Output relay is activated when a phase has lost or an unbalanced phase-neutral value, which is occurred with any reason, is smaller than the Asymetrical value which is defined for the device. If this unbalanced voltage exceeds the adjusted Asymetrical value, output will release itself and motor will be Switched-off.

In Applications; a proper device must be used regarding to the inducted voltage value in two-phase which are remained after the other one has lost.

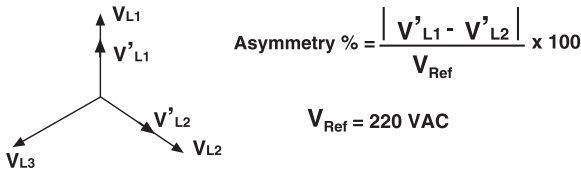


The voltage asymmetry causes the rise in motor temperature and a reduction of the rated motor power.

2. Phase Sequence (MKC-03, MKC-03P, MKS-03, MKC-04)

When the phase sequence is correct (L1, L2, L3 in clockwise direction) the output relay is activated; however, if the sequence is changed by any reason, the output relay switches OFF immediately.


Function Diagram

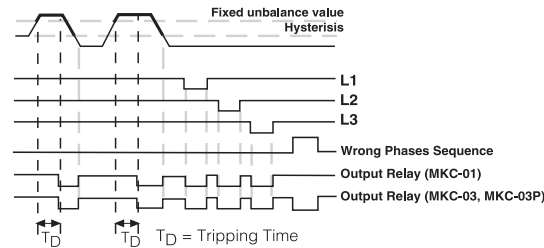

3.PTC Protection (Only Available in MKC-03P versions)

When the coil temperature in motors exceeds T_c , the limit temperature of PTC, the output relay switches off immediately, Relay LED turns OFF.

This feature is included only in MKC-03P. See following figure for typical resistance of PTC vs temperature characteristics for three different switching temperatures (110 °C, 120 °C, 130 °C), changed upon request. If you want to disable the PTC protection of a device with PTC terminals on the device must be short-circuited.

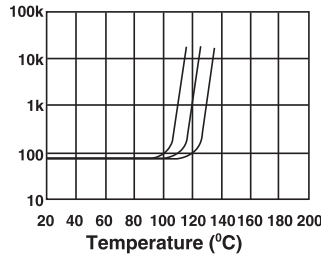

Precautions For Installation and Safe Use


Failure to follow those instructions will result in death or serious injury.

- Disconnect all power before working on equipment.
- When the device is connected to the network, do not remove the front panel.
- Do not try to clean the device with solvent or the like. Only clean the device with a dried cloth.
- Verify correct terminal connections when wiring.
- Electrical equipment should be serviced only by your compedent seller.
- Mount device to the panel.

⚠ No responsibility is assured by the manufacturer or any of its subsidiaries for any consequences arising out of the use of this material.

Note:The contact resistance at ohmic load (eg: Incandescent bulb, Resistance devices) is 8A.It is recommended to use a contactor if the inductive load eg: AC motor, fluorescent, etc.) or capacitive load (eg : Led Drivers, UPS, Fluorescent (Electronic Ballast), etc.) switch. Otherwise adhesion may occur in relay contacts.


Connection Diagram

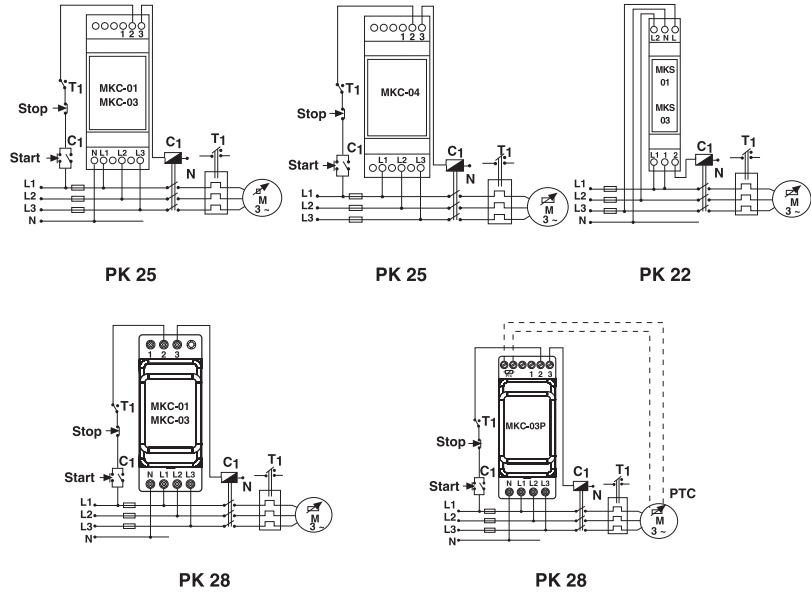

Technical Data

- Rated Voltage (Un) : Please look at labels on the device.
- : 3 phase and neutral 220-230 VAC
- : 4 Wires Star Connection (MKC-01, MKC-03, MKC-03P, MKS-01, MKS-03)
- : 3 Phase 380 VAC
- : 3 Wires Delta Connection (MKC-04)
- : 3 Phase 220 V AC
- : 3 Wires Delta Connection (MKC-04)
- Operating Range : (0.9-1.1) x Un (MKC-04, MKC-03P)
- : (0.8-1.2) x Un (MKC-01, MKC-03, MKS-01, MKS-03)
- Rated Frequency : 50/60 Hz.
- Output Contacts : 1 C/O, 8A, 250 V AC, 2000 VA, Cosφ=1 (MKC-01, MKC-03, MKC-03P, MKC-04)
- : 1 NO, 8A, 250 V AC, 2000 VA, Cosφ=1 (MKS-01, MKS-03)
- Warning LEDs : LED output, normally ON (OFF for any fault)
- : ON LED'i: On when supply voltage is present (MKC-01, MKC-03, MKC-03P)
- Tripping Time : 0.2 sec.
- Ambient Temperature : -20 °C ; +55 °C
- Storage Temperature : -40 °C ; +70 °C
- Protection Class : IP 20
- Dimension : Type PK 22 (MKS-01, MKS-03)
- : Type PK 25 (MKC-01, MKC-03, MKC-04)
- : Type PK 28 ((MKC-01, MKC-03, MKC-03P)
- Installation : Surface mounting or on the mounting rails.
- : Panel mounting with screws and adapter is possible. (Refer to Figure 1)
- Weight : 0.08 kg. (MKS-01, MKS-03)
- : 0.1 kg. (MKC-01, MKC-03)
- : 0.2 kg. (MKC-04, MKC-03P)

Dimensions

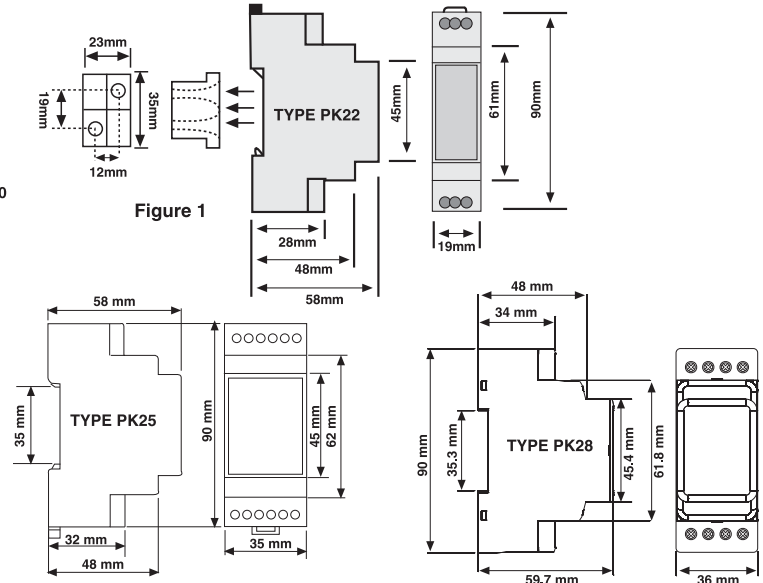

ENTES Elektronik Cihazlar Imalat ve Ticaret A.S.

Address :Dudullu OSB; 1. Cadde; No: 23 34775 Umraniye - ISTANBUL / TURKEY

Tel: +90 216 313 01 10 Fax: +90 216 314 16 15 www.entes.com.tr

