

eBOX622-831-FL

Fanless Embedded System with Intel® Atom™ N270 1.6 GHz Processor, Intel® 945GSE + ICH7M Chipset and 6 RS-232




Features

- Intel® Atom™ processor N270 1.6 GHz onboard
- Intel® 945GSE + ICH7M chipset
- Supports 6 RS-232 ports
- Fanless operation design with full feature I/O
- High performance DDR2 SODIMM max. up to 2 GB
- One 2.5" SATA drive bay
- Watchdog Timer



◀ Front view

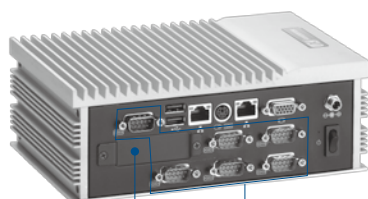

◀ Rear view

6 RS-232
Front access CF slot

Specifications

Standard Color	Silver-Black
Construction	Aluminum extrusion and heavy-duty steel, IP40
CPU	Intel® Atom™ processor N270 1.6 GHz
System Memory	1 x 200-pin DDR2 SO-DIMM max. up to 2 GB
Chipset	Intel® 945GSE + ICH7M
BIOS	AMI 8Mbit with RPL/PXE LAN boot ROM
System I/O Outlet	6 x RS-232 (COM 1 - 6, optional COM 2 as RS-485) 1 x VGA 1 x Audio (Mic-in/Line-out) 1 x PS/2 keyboard/mouse 2 x 10/100/1000Mbps Ethernet 4 x USB 2.0 1 x Vbc power input connector 1 x ATX power switch
Watchdog Timer	255 levels, 1 - 255 sec.
Storage	1 x 2.5" SATA HDD drive bay 1 x CompactFlash™
Expansion Interface	N/A
System Indicator	1 x green LED for system power-on 1 x orange LED for HDD active
Power Supply	Screw type AC 60W adapter Input: AC 90-264V Output: DC12V@5A
Operating Temperature	-10°C - +50°C (14°F - 122°F) (with 1.6 GHz CPU, W.T. HDD)
Storage Temperature	-20°C - +80°C (-4°F - +176°F)
Humidity	10%-90% , non-condensing
Vibration Endurance	2 Grms w/ CF (5-500Hz, X, Y, Z directions)
Dimensions	200 mm (7.87") (W) x 120 mm (4.72") (D) x 75 mm (2.95") (H)
Weight (net/gross)	1.9 kg (4.19 lb)/2.7 kg (5.95 lb)
Certification	CE Class A
EOS Support	XPE, WinCE, Linux

* XPE: Windows® XP Embedded

Packing List

1 x quick manual
1 x driver CD
1 x Y cable for PS/2 keyboard/mouse
1 x screw pack
4 x foot pad
1 x power adapter
2 x CF mylar
1 x US power cord

Power Protection

AC Version

OVP (over voltage protection)	OCP (over current protection)
SCP (short circuit protection)	

Ordering Information

Standard	
eBOX622-831-FL 1.6G	Fanless embedded system with Intel® Atom™ N270 1.6 GHz processor, VGA, AC 60W adapter, CF & HDD support and 6 RS-232
eBOX622-831-FL 1.6G-485	Fanless embedded system with Intel® Atom™ N270 1.6 GHz processor, VGA, AC 60W adapter, CF & HDD support, 5 RS-232 and 1 RS-485
eBOX622-831-FL 1.6G w/o Adapter	Fanless embedded system with Intel® Atom™ N270 1.6 GHz processor, VGA, CF & HDD support, 6 RS-232 and w/o adapter
Optional	
2.5" SATA HDD	40 GB or above
DDR2 SODIMM	256 MB - 2 GB
CompactFlash™	256 MB or above
Din rail kit	
Wall mount kit	
VESA mount kit	
Power Cord	

*Specifications and certifications are based on options and may vary.

Dimensions

