
P1177S-871

17" SXGA TFT Intel® Core™ i family/ Pentium®/ Celeron® Slim Industrial Panel Computer





- 1. COM 1 with 5V & 12V (RS-232/422/485)
- 2. DVI-I
- 3. Ethernet x 2
- 4. Audio (MIC-in/Line-out) 5. COM 3 with 5V & 12V (RS-232)

- 6. USB 2.0 x 2 7. AC plug

11. USB 3.0 x 4

12. COM 4 (RS-232)

- 8. Power switch
- 9. COM 2 (RS-232)
- 10. HDMI

Features

- 17" SXGA TFT LCD display
- High performance system supporting LGA1155 socket 3rd & 2nd Generation Intel® Core™ i7/ i5/ i3/ Pentium®/ Celeron® processors
- Intel® Q77 PCH
- Easy installation: a less screw design for user's convenience
- 4 USB 3.0, 2 USB 2.0 and 4 COM ports
- Built-in speakers and optional Wi-Fi 802.11 b/g/n module
- Robust aluminum with IP65 compliant front bezel design











Introduction

The P1177S-871 is a multi-media touch panel PC for kiosk application. It has a fashionable mechanism design and industrial-grade material front bezel which can avoid damage from chemical corrosion. To meet the demands of multimedia application, the P1177S-871 is powered by the high performance LGA1155 socket 3rd & 2nd Generation Intel® Core™ i7/ i5/ i3/ Pentium®/ Celeron® processors with Intel® Q77 Express chipset. It features four COM ports, two Gigabit Ethernet and up to 16 GB memory of dualchannel DDR3 that delivers high computing capability for high performance-demanding applications. The industrial panel PC is most suitable for kiosk, factory and automation fields.

Dual display

The P1177S-871 supports DVI and HDMI simultaneously that features the use of dual display devices for increasing the area available for programs running on a single computer system. It not only increases larger screen viewing but also improves personal productivity.

Speaker and WLAN antenna supported

The P1177S-871 features built-in speakers for kiosk application to display multimedia content program. It also supports WLAN module (optional) antenna for wireless network connectivity

Specifications

Front Bezel	Aluminum w/ IP65/NEMA 4 rugged protection	
LCD Panel	Display Type	17" SXGA TFT LCD
	Brightness	380 nits
	Resolution	1280 x 1024 pixels
	Viewing Angle	170°/160°
Main System	CPU	LGA1155 socket 3rd & 2nd Generation Intel® Core™ i7/ i5/ i3/ Pentium®/ Celeron® processors
	Chipset	Intel® Q77
	System Memory	2 x 204-pin DDR3 SO-DIMM max. up to 16 GB
	BIOS	AMI UEFI BIOS with OA 3.0 built
	Storage	1 x 3.5" or 2 x 2.5" SATA HDD
	Watchdog Timer	255 levels, 1~255 sec.

^{*} All specifications and photos are subject to change without notice.

Specifications

IO Connector	2 x RS-232 (COM 2 & COM 4) 1 x RS-232/422/485 with 5V & 12V (COM 1) 1 x RS-232 with 5V & 12V (COM 3)	
	1 x DVI-I	
	1 x HDMI	
	4 x USB 3.0	
	2 x USB 2.0	
	2 x 10/100/1000 Mbps Ethernet	
	1 x Audio (Mic-in/Line-out)	
Expansion Interface	N/A	
Touchscreen	5-wire resistive type	
	Light transmission 79%	
	1 million activations (typical) at a single point	
Power Supply	100 ~ 240VAC, 270W	
Dimensions	410 mm (16.14") (W) x 80 mm (3.15") (D) x 338 mm (13.3") (H)	
Packing Dimension	610 mm (24.02") (W) x 260 mm (10.24") (D) x 590 mm (23.23") (H)	
Weight(net/gross)	7 kg (15.43 lb)/ 10.8 kg (23.8 lb)	
Environment	Operating Temperature: 0° ~ +45°C (32°F ~ 113°F) Storage Temperature: -20°C ~ +60°C (-4°F ~ +140°F) Relative humidity: 10 ~ 95%@40°C, non-considering Operating vibration: 1.0G, 5-500Hz, random	
Certification	CE	

Ordering Information

P1177S-871	17" SXGA TFT Intel® Core™ i7/ i5/ i3/ Pentium®/ Celeron® slim industrial panel computer
* Specification and certifi	ications are based on options and may vary.

Optional Accessories

82211271000E	Wireless LAN kit
82011750130E	2.5" HDD Kit
82211770060E	VESA & WALL mount kit
82211770070E	Rack mount kit


Optional OS Installation


Windows® 7	
Windows® Vista	
Windows® XP	
Windows® Embedded 8	




▲ Slim design

Dimensions

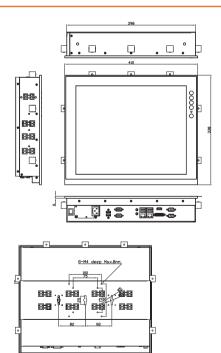





Industrial Panel Computers & Monitors

Overview

Heavy-duty Fanless Touch Panel Computers

Digital Signage Solutions

Healthcare & Medical Solutions

Open Frame Panel Computers

Accessories

88

84

^{*} All specifications and photos are subject to change without notice. © 2013 Axiomtek Co., Ltd. All rights reserved.