

DiskOnModule

Turbo DQ Series



Table of Contents

1. Description 1

2. Features 1

3. Introduction 1

4. Specification 2

5. Physical Outline 4

Revision History

Revision	Date	History	Remark
A.0	12/26 '05	First document announced	
A.1	01/05 '06	Update Approval sheet	
A.2	06/30 '06	Modify the format	

"PQI reserves the right to make changes without notification when fit, form, function, quality and reliability are not affected. The data sheets do not constitute contract documents and should not be considered part of the specification for purposes of any warranty."

1. Description

PQI's **DiskOnModule DQ series** based on NAND type flash memory controller technology. This product complies with 44 PIN IDE (ATA) standard interface and is suitable for data storage memory medium for portable system. By using **DiskOnModule** it is possible to operate good performance for the portable system which have IDE interface slots.

2. Features

- High Performance
- Non-volatile Flash Memory

The DOM is implemented by using NAND type flash memory, which is a high density, non-volatile read/write device. Flash data retention is guaranteed for at least 10 years, with no battery or other power source required.

- 100% True Mode IDE HDD Compatible
- Broad Operating System and Processors Supports
- Capacities 32MB-4GB
- Low Power Consumption
- Robust Error Correction
- High Reliability

3. Introduction

1. About This Manual

This manual provides instructions for the installation and specification of PQI's **DiskOnModule**, **DiskOnModule** is designed for use in PCs, and their respective compatible computers.

2. What is DiskOnModule?

PQI's **DiskOnModule** is a storage device based on flash memory technology, which emulates an ordinary magnetic hard disk. The **DiskOnModule** series products provide an all in one module solution for solid-state flash disk. The **DiskOnModule** is suitable for use in portable and embedded systems which have limited space and power consumption.

Unlike standard IDE drives, no signal cable and extra, special space is required. The **DiskOnModule** is a solid-state solution for IDE Hard Disk drive, which has no moving parts. That provides a good stability in a moving system. The **DiskOnModule** products are also free from extra and special algorithm or some firmware driver. Just plug the **DiskOnModule** into the IDE slot and play it, users can play the **DiskOnModule** as same as the Hard Disk Drives.

The **DiskOnModule** family provides the capacities ranging from 32MB up to 4GB. In the future, the capacity will be increased up to 8GB.

4. Specification

Environment Specifications		
Temperature(Industrial)	Operating	0°C to +70°C
	Non-Operating	-40°C to +85°C
Temperature(Wide Temp)	Operating	-40°C to +85°C
	Non-Operating	-55°C to +95°C
Relative Humidity		8% to 95% (with no condensation)
Vibration	Operating	15G
	Non-operating	15G
Shock	Operating	1000G
	Non-operating	1000G
Sector size		512Bytes
System Performance		
Media transfer rate	Read	Up to 15 Mb/sec(typ.)*
	Write	Up to 13 Mb/sec(typ.)*
Interface burst transfer rate		
PIO mode 4		16.6 Mb/sec (max)
Ultra DMA 2		33 Mb/sec (max)
Reliability		
MTBF(@25°C)		1,000,000 hours
Read/Write Cycle		2,000,000 times
ECC		1 Byte per 128bytes
Power Requirement		
Voltage		DC+3.3V±5%
		DC +5.0V±10%
Power Consumption		
Read		37mA (typ.)
Write		32.5mA (typ.)
Stand by		5mA (typ.)
Dimensions		
Height		50.2± 0.2mm
Width		27.5 ± 0.1mm
Thickness		6.5 ± 0.1mm



Note1: There will be different figures shown in different platforms

Capacity Specifications

Capacity	Cylinder	Head	Sector
32MB	62	16	63
64MB	125	16	63
128MB	251	16	63
256MB	503	16	63
512MB	1007	16	63
1024MB	2015	16	63
2048MB	4030	16	63
4096MB	8061	16	63

5. Physical Outline
DQ0XXX88RX0 (44 PIN)

M= Master
S= Slave

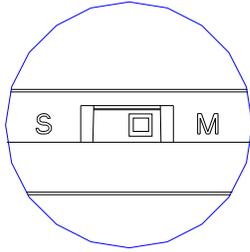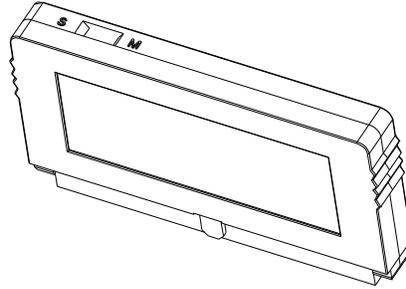

A Detail S= 2:1

