HS-100 Series Vibration Sensor

M12 Connector, 100mV/g Industrial Accelerometer



Typical Applications

Proven use in vibration monitoring for offline applications using commercially available data collectors and online monitoring systems in the fields of Building Services, Civil Engineering, Paper and Pulp, Mining, Metals Manufacture, Utilities, Automotive, Water and Waste Treatment, Pharmaceutical, Aerospace, Wind Power, etc.

Protecting...

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyers, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, HVAC, Spindles, Machine Tooling, Process Equipment and many more.

Technical Performance

Mounted Base Resonance

Sensitivity

Frequency Response

Isolation

Measurement Range

Transverse Sensitivity

22 kHz (nominal)

100 mV/g ±10% Nominal 80 Hz at 22 °C

2 Hz to 10 kHz ±5 % 0.8 Hz to 15 kHz ±3 dB

Base isolated

±80 a

Less than 5%

Electrical

Electrical Noise 0.1 mg max **Current Range** 0.5 mA to 8 mA Bias Voltage 10 - 12 Volts DC Settling Time 2 seconds Output Impedance 200 Ohms max. Case Isolation >108 Ohms at 500 Volts

Environmental

-25 to 80 °C Operating Temperature Range

Sealing **IP67** 5000 q Maximum Shock

EN61000-6-4:2001 **Emissions** EN61000-6-2:1999 **Immunity**

Mechanical

Case Material Stainless Steel Sensing Element/Construction PZT/Compression

8 Nm Mounting Torque

Weight

110 gms (nom) Maximum Cable length 1000 metres M8 x 1.25mm Male Mounting Thread


Options Integral cable, filters, temperature output,


various connector assemblies, other sensitivities




Tel: +44(0) 845 680 1957 Fax: +44(0) 845 680 1958 Email: sales@hansfordsensors.com Web: www.hansfordsensors.com

HS-100 Series Vibration Sensor

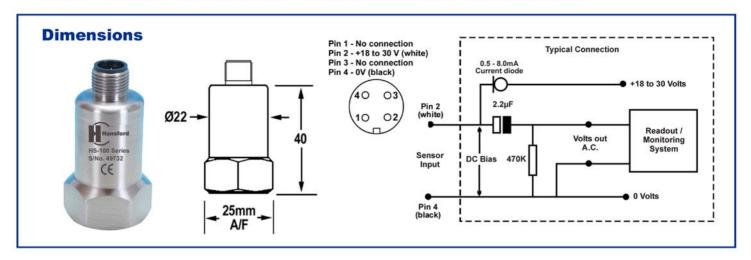

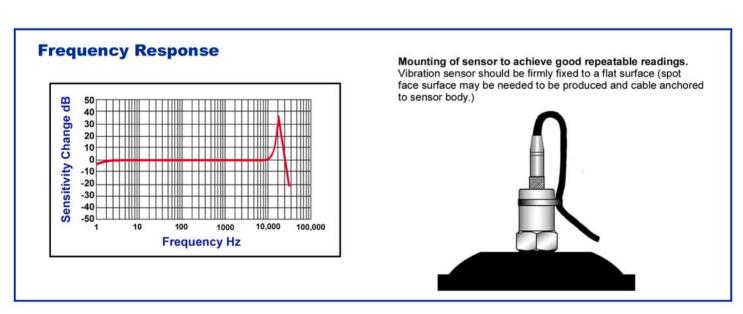

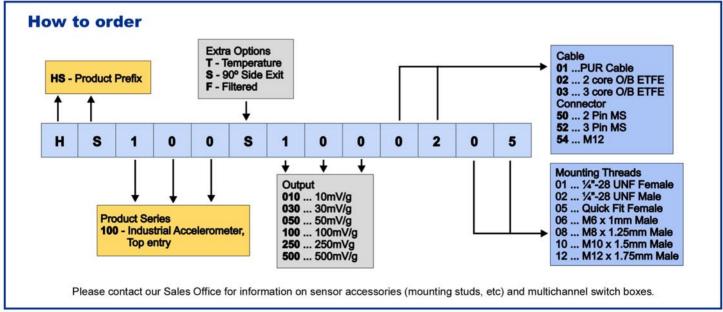

TS015 Iss01

We reserve the right to alter the specification of this product without prior notice.

Ref: HS1004P-0107



Tel: +44(0) 845 680 1957 Fax: +44(0) 845 680 1958 Email: sales@hansfordsensors.com Web: www.hansfordsensors.com





